


Rack-Mount Panels

Keystone Module Panels – Medium Density

266-PKM02-24000	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	Unloaded, w/o Label Holders
266-PKM02-24A[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	White Bezels, w/o Label Holders
266-PKM02-24B[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	Black Bezels, w/o Label Holders
266-PKM03-24000	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	Unloaded, Label Holders
266-PKM03-24A[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	White Bezels, Label Holders
266-PKM03-24B[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	Black Bezels, Label Holders

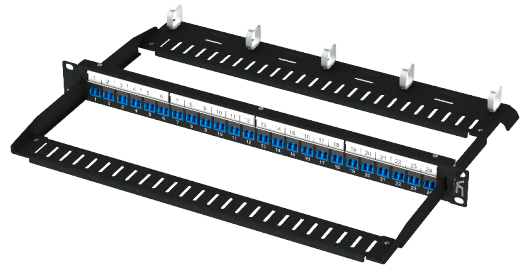

Panels with White Bezels

		BLUE	GREEN	BEIGE	AQUA	H. VIOLET
FC	24 modules 24 fibers					
		266-PKM02-24A3Z 266-PKM03-24A3Z	266-PKM02-24A3Y 266-PKM03-24A3Y	266-PKM02-24A3A 266-PKM03-24A3A	266-PKM02-24A3C 266-PKM03-24A3C	266-PKM02-24A3D 266-PKM03-24A3D
ST	24 modules 24 fibers					
		266-PKM02-24A4Z 266-PKM03-24A4Z	266-PKM02-24A4Y 266-PKM03-24A4Y	266-PKM02-24A4A 266-PKM03-24A4A	266-PKM02-24A4C 266-PKM03-24A4C	266-PKM02-24A4D 266-PKM03-24A4D
SC SX	24 modules 24 fibers					
		266-PKM02-24A3Z 266-PKM03-24A3Z	266-PKM02-24A3Y 266-PKM03-24A3Y	266-PKM02-24A3A 266-PKM03-24A3A	266-PKM02-24A3C 266-PKM03-24A3C	266-PKM02-24A3D 266-PKM03-24A3D
LC DX	24 modules 48 fibers					
		266-PKM02-24A4Z 266-PKM03-24A4Z	266-PKM02-24A4Y 266-PKM03-24A4Y	266-PKM02-24A4A 266-PKM03-24A4A	266-PKM02-24A4C 266-PKM03-24A4C	266-PKM02-24A4D 266-PKM03-24A4D

Panels with Black Bezels

		BLUE	GREEN	BEIGE	AQUA	H. VIOLET
FC	24 modules 24 fibers					
		266-PKM02-24B3Z 266-PKM03-24B3Z	266-PKM02-24B3Y 266-PKM03-24B3Y	266-PKM02-24B3A 266-PKM03-24B3A	266-PKM02-24B3C 266-PKM03-24B3C	266-PKM02-24B3D 266-PKM03-24B3D
ST	24 modules 24 fibers					
		266-PKM02-24B4Z 266-PKM03-24B4Z	266-PKM02-24B4Y 266-PKM03-24B4Y	266-PKM02-24B4A 266-PKM03-24B4A	266-PKM02-24B4C 266-PKM03-24B4C	266-PKM02-24B4D 266-PKM03-24B4D
SC SX	24 modules 24 fibers					
		266-PKM02-24B3Z 266-PKM03-24B3Z	266-PKM02-24B3Y 266-PKM03-24B3Y	266-PKM02-24B3A 266-PKM03-24B3A	266-PKM02-24B3C 266-PKM03-24B3C	266-PKM02-24B3D 266-PKM03-24B3D
LC DX	24 modules 48 fibers					
		266-PKM02-24B4Z 266-PKM03-24B4Z	266-PKM02-24B4Y 266-PKM03-24B4Y	266-PKM02-24B4A 266-PKM03-24B4A	266-PKM02-24B4C 266-PKM03-24B4C	266-PKM02-24B4D 266-PKM03-24B4D

* All adapters are equipped with zirconia-ceramic split sleeves compatible with MM and SM fibers.

KITTING

As-delivered:

266-PKM02-24000	266-PKM02-24A/B	266-PKM03-24000	266-PKM03-24A/B
1 x panel	1 x panel 24 x keystone modules	1 x panel	1 x panel 24 x keystone modules
1 x set of mounting screws 1 x shipping box	1 x set of mounting screws 1 x shipping box	4 x label holders 1 x set of mounting screws 1 x shipping box	4 x label holders 1 x set of mounting screws 1 x shipping box

Not included:

266-PKM02-D8000	266-PKM02-D8A/B	266-PKM03-D8000	266-PKM03-D8A/B
keystone modules cable management bars	cable management bars	keystone modules cable management bars	cable management bars
label holders	label holders		

CROSS-CONNECT

Rack-Mount Panels

Keystone Module Panels – Medium Density



CHARACTERISTICS

Form-factor:	19-in rack/cabinet mounting standard (EIA-ECA-310-E).
Capacity:	twenty-four keystone modules; up to 24 optical fibers (FC, ST, SC SX adapters); up to 48 optical fibers (LC DX adapters).
Materials:	1.5-mm (16-GA) CRS; black powder coating, RAL 9005 (jet black).
Connectors:	see 264-KMB Series
Adapter orientation:	key/latch up.
Cable management:	front and rear (concurrent use), removable, interchangeable. (sold separately).
Labeling:	266-PKM02: factory-applied position number labeling; 266-PKM03: four plastic label holders, plain-paper label inserts.
Rack mounting:	set of USCU fasteners: 4 × #10-32 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12-24 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12 × 9/16 × 3/8 plain round washers, nylon, black.
Environmental:	operating temperature: -20 °C–+70 °C (-4 °F–+158 °F); operating humidity: ≤95 % RH non-condensing.
Dimensions:	W: 485 mm (19 in); H: 44.5 mm (1.75 in) [1 RMU]; D: 15 mm (0.6 in).
Weight:	0.6 kg (1.3 lb) without keystone modules.