



CAT5E RJ45 MODULAR PLUG

3 PRONG 50 μ" GOLD PLATED (SHIELDED) FEED THROUGH DESIGN

011-019/EZF-100

ELECTRICAL

Voltage Rating:	250 VAC RMS
Current Rating:	2 Amps
Insulation Resistance:	500m Ω
Termination Resistance:	35m Ω Max

MECHANICAL

Cable to Plug Tensile Strength:	20 lb
Durability:	500 Mating Cycles

MATERIAL






Housing:	Polycarbonate UL94V-2
Shield:	Over Housing
Color:	Transparent
Contact Blade:	Copper Alloy 3 Prong
Conductor Type:	Solid/Stranded Wire
Conductor Size:	24 AWG - 26 AWG
Insulation Size:	0.040 in. (1.02 mm)
Gold Plating:	50 μ"

DESCRIPTION

CAT5E, RJ45 Modular, 8P 8C,
50 μ" (Micro-Inches) Gold Plated,
Feed Through Style.

FEATURES

- 50 Micro-Inches Gold Plated 3 Prong
- Feed Through Design
- Shielded for Protection Against EMI/RFI
- 24 AWG - 26 AWG Cable
- For Round Solid / Stranded CAT5E (8 Conductor)

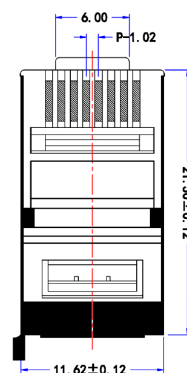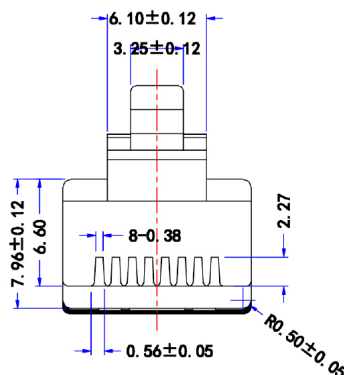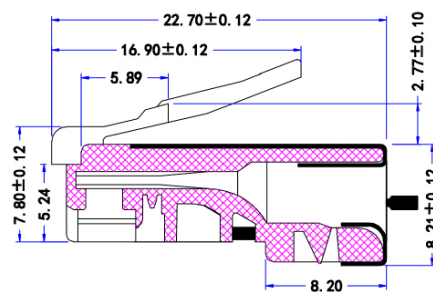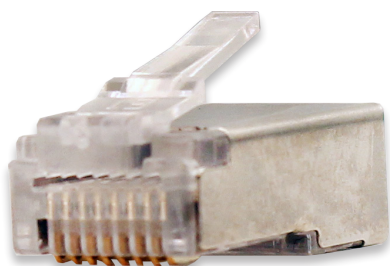

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York

713.322.7242 Texas

verticalcable.com

Rev. 3/2024

Subject to change without notice.