

DIRECT BURIAL AUDIO CABLE

14 AWG 4 CONDUCTOR

CMX (UV) RATED



DESCRIPTION

14 AWG 4 Conductor Direct Burial, CMX (UV) Stranded Bare Copper, Unshielded with an overall jacket.

APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications
- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- UV Rated Outer Jacket



209-2321/DB

Part Number:	Description:
209-2321/DB	Audio Cable, Stranded, Unshielded, 14 AWG 4 C, Black 500 ft.

CONSTRUCTION

Conductor count:	4
Shape:	Round
Rip cord:	Yes
Water Block Tape:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	14 AWG
Stranding:	105/0.16 mm
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.10 in. (2.60 mm)
Insulation color:	Red, Black, White, Green

JACKET

Material:	Polyethylene (PE)
Thickness:	0.04 in. (0.95 mm)
O.D.:	0.32 in. (8.20 mm)
Marking:	VERTICAL 5024318 c(ETL)usAUDIO CABLE 14AWG 4 COND 105 STRANDED OXYGEN FREE OUTDOOR UV DIRECT BURIAL RoHS XXXFT

MECHANICAL


Temperature rating:	75° C
Before Tensile Strength (Mpa):	≥13.8
Aging Elongation (%):	≥100
Aging Condition (°Cxhrs):	100x168
After Tensile Strength (Mpa):	≥85% of unaged
Aging Elongation (%):	≥50% of unaged
Cold Bend (-20±2° Cx4hrs):	No Crack

SAFETY

NFPA 70 (NEC®) rating:	CMX (UV)
Voltage rating:	300 V RMS

PACKED WEIGHT

209-2321/DB:	40.6 lb (18.4 kg)
--------------	-------------------

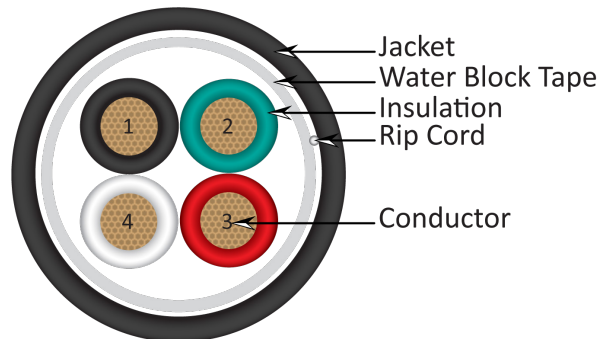

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



www.verticalcable.com

Rev. 3/2024

Subject to change without notice.