


- 266-PKM04[x]24000 Optical Fiber Rack-Mount Panel, Front Pull-Out Keystone-Module Blocks, Labeling, 1-RMU, 24-Pos, Unloaded
- 266-PKM04[x]24A[y][z] Optical Fiber Rack-Mount Panel, Front Pull-Out Keystone-Module Blocks, Labeling, 1-RMU, 24-Pos, White Bezels
- 266-PKM04[x]24B[y][z] Optical Fiber Rack-Mount Panel, Front Pull-Out Keystone-Module Blocks, Labeling, 1-RMU, 24-Pos, Black Bezels

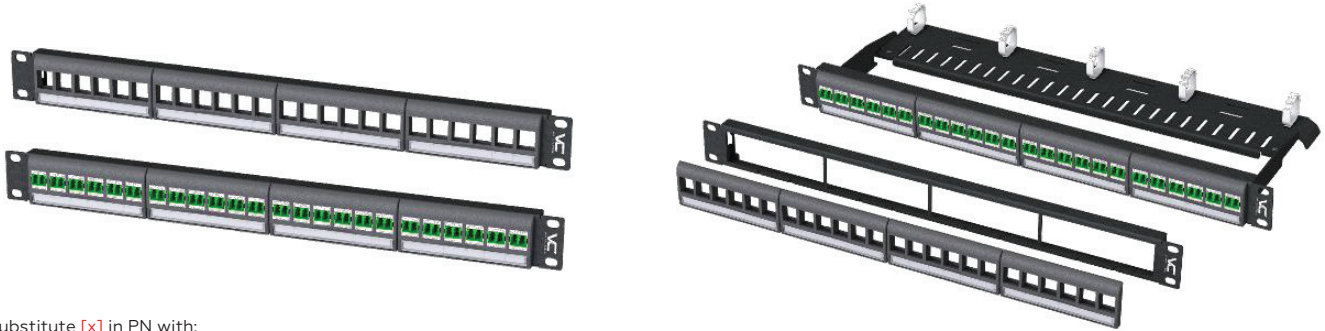

Substitute [x] in PN with:

- no CMB;
 - A 266-CFM00-2A2A CMB (General Purpose, 2-in Deep, Extended Width), see 266-CFM Series for details.
- PN example: 266-PKM04-24000 unloaded panel, supplied without cable management bar.
 PN example: 266-PKM04A24A4Y loaded panel, 24 white keystone modules with green LC DX adapters, supplied with one 266-CFM00-2A2A CMB.

Panels with White Bezels

			BEIGE	AQUA	H. VIOLET	BLUE	GREEN
FC	24 modules 24 fibers						
		266-PKM04-24A10 266-PKM04A24A10	266-PKM04-24A3A 266-PKM04A24A3A	266-PKM04-24A3C 266-PKM04A24A3C	266-PKM04-24A3D 266-PKM04A24A3D	266-PKM04-24A3Z 266-PKM04A24A3Z	266-PKM04-24A3Y 266-PKM04A24A3Y
ST	24 modules 24 fibers						
		266-PKM04-24A20 266-PKM04A24A20	266-PKM04-24A4A 266-PKM04A24A4A	266-PKM04-24A4C 266-PKM04A24A4C	266-PKM04-24A4D 266-PKM04A24A4D	266-PKM04-24A4Z 266-PKM04A24A4Z	266-PKM04-24A4Y 266-PKM04A24A4Y
SC SX	24 modules 24 fibers						
LC DX	24 modules 48 fibers						

Panels with Black Bezels

			BEIGE	AQUA	H. VIOLET	BLUE	GREEN
FC	24 modules 24 fibers						
		266-PKM04-24B10 266-PKM04A24B10	266-PKM04-24B3A 266-PKM04A24B3A	266-PKM04-24B3C 266-PKM04A24B3C	266-PKM04-24B3D 266-PKM04A24B3D	266-PKM04-24B3Z 266-PKM04A24B3Z	266-PKM04-24B3Y 266-PKM04A24B3Y
ST	24 modules 24 fibers						
		266-PKM04-24B20 266-PKM04A24B20	266-PKM04-24B4A 266-PKM04A24B4A	266-PKM04-24B4C 266-PKM04A24B4C	266-PKM04-24B4D 266-PKM04A24B4D	266-PKM04-24B4Z 266-PKM04A24B4Z	266-PKM04-24B4Y 266-PKM04A24B4Y
SC SX	24 modules 24 fibers						
LC DX	24 modules 48 fibers						

* All adapters are equipped with zirconia-ceramic split sleeves compatible with MM and SM fibers.

KITTING

As-delivered:

266-PKM04-24000	266-PKM04-24A	266-PKM04-24B
1 × panel	1 × panel	1 × panel
4 × keystone-module blocks	4 × keystone-module blocks	4 × keystone-module blocks
	24 × keystone modules, white bezels	24 × keystone modules, black bezels
4 × paper label inserts	4 × paper label inserts	4 × paper label inserts
1 × set of mounting screws	1 × set of mounting screws	1 × set of mounting screws
1 × shipping box	1 × shipping box	1 × shipping box

Not included:

266-PKM04-24000	266-PKM04-24A	266-PKM04-24B
keystone modules		
cable management bars	cable management bars	cable management bars

CHARACTERISTICS

Form-factor:	19-in rack/cabinet mounting standard (EIA-ECA-310-E).
Capacity:	twenty-four keystone modules; up to 24 optical fibers (FC, ST, SC SX adapters); up to 48 optical fibers (LC DX adapters).
Materials:	panel: 1.5-mm (16-GA) CRS; black powder coating, RAL 9005 (jet black). blocks: high-impact-resistant polycarbonate (PC) resin, UL 94 V-0.
Keystone-module blocks:	front-retractable, patented toolless mechanism.
Labeling:	holder: integral to keystone-module block, clear window; medium: plain-paper inserts, factory-preprinted position numbers.
Connectors:	see Optical Fiber Keystone Modules Data Sheet (264-KMB Series)
Adapter orientation:	key/latch up.
Cable management:	rear, removable, interchangeable (sold separately).
Rack mounting:	set of USCU fasteners: 4 × #10-32 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12-24 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12 × 9/16 × 3/8 plain round washers, nylon, black.
Environmental:	operating temperature: -20 °C–+70 °C (-4 °F–+158 °F); operating humidity: ≤95 % RH non-condensing.
Dimensions:	W: 485 mm (19 in); H: 44.5 mm (1.75 in) [1 RMU]; D: 21 mm (0.83 in).
Weight:	0.3 kg (0.63 lb) without keystone modules.