

# AUDIO CABLE

## 14 AWG 2 CONDUCTOR

### STRANDED CABLE



## 209-2320 SERIES

Part Number:	Description:
209-2320	Audio Cable, Stranded, Unshielded, 14 AWG 2 C, White 500 ft.
209-2320/BK	Audio Cable, Stranded, Unshielded, 14 AWG 2 C, Black 500 ft.
209-2320/PR	Audio Cable, Stranded, Unshielded, 14 AWG 2 C, Purple 500 ft.

## DESCRIPTION

14 AWG 2 Conductor Stranded Bare Copper, Unshielded with an overall jacket.

### CONSTRUCTION

Conductor count: 2  
 Shape: Round  
 Rip cord: Yes

### CONDUCTORS

Material: Stranded bare copper  
 Trade size: 14 AWG  
 Stranding: 41/0.25 mm  
 Insulation material: Polyvinyl Chloride (PVC)  
 Insulation O.D.: 0.08 in. (2.10 mm)  
 Insulation color: Red, Black, White, Green

### JACKET

Material: Polyvinyl Chloride (PVC)  
 Thickness: 0.02 in. (0.60 mm)  
 O.D.: 0.25 in. (6.40 mm)  
 Marking: VERTICAL 5024318 c(ETL)usAUDIO CABLE 14AWG 2 COND 41 STRANDED OXYGEN FREE CMR FT4 CL3R RoHS XXXFT 53203M0725102

### MECHANICAL

Temperature rating: 75° C  
 Before Tensile Strength (Mpa): ≥13.8  
 Aging Elongation (%): ≥100  
 Aging Condition (°Cxhrs): 100x168  
 After Tensile Strength (Mpa): ≥85% of unaged  
 Aging Elongation (%): ≥50% of unaged  
 Cold Bend (-20±2° Cx4hrs): No Crack

### SAFETY


NFPA 70 (NEC®) rating: CMR/CL3  
 Voltage rating: 300 V RMS

### PACKED WEIGHT

209-2320: 22 lb (10 kg)  
 209-2320/BK: 22 lb (10 kg)  
 209-2320/PR: 22 lb (10 kg)

## APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications

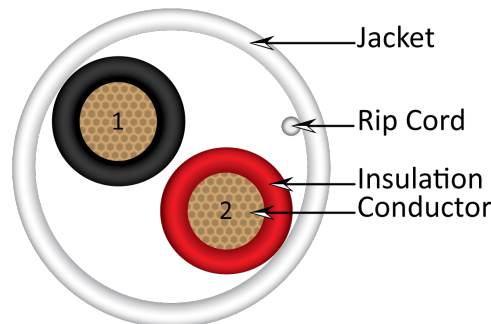

## VERTICAL CABLE

951.696.7772 California  
 800.749.2447 Florida  
 845.391.8318 New York  
 713.322.7242 Texas



verticalcable.com

Rev. 4/2024  
 Subject to change without notice.