











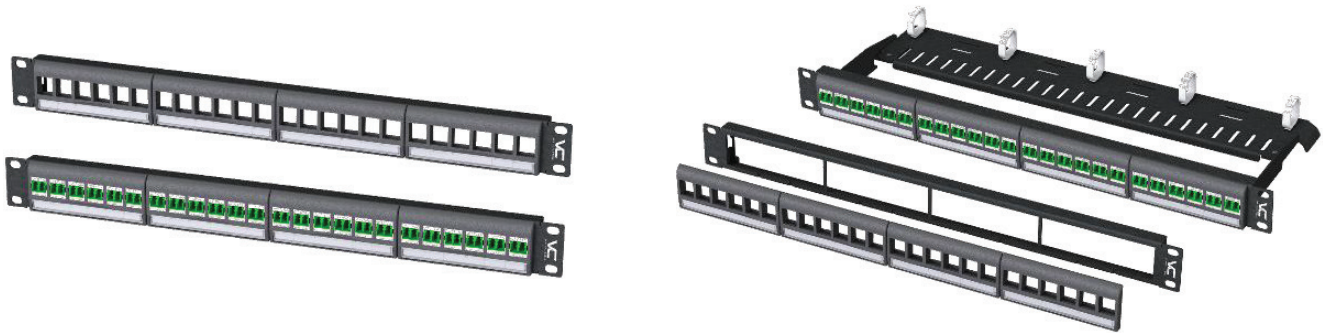



- 266-PKM04-24000 Optical Fiber Rack-Mount Panel, Front-Retractable Keystone-Module Blocks, Label Holder, 1-RMU, 24-Position, Unloaded
- 266-PKM04-24A[x][y] Optical Fiber Rack-Mount Panel, Front-Retractable Keystone-Module Blocks, Label Holder, 1-RMU, 24-Position, White Bezels
- 266-PKM04-24B[x][y] Optical Fiber Rack-Mount Panel, Front-Retractable Keystone-Module Blocks, Label Holder, 1-RMU, 24-Position, Black Bezels



Panels with White Bezels

			BLUE	GREEN	BEIGE	AQUA	H. VIOLET
FC	24 modules 24 fibers	 266-PKM04-24A10	 266-PKM04-24A3Z	 266-PKM04-24A3Y	 266-PKM04-24A3A	 266-PKM04-24A3C	-
ST	24 modules 24 fibers	 266-PKM04-24A20	 266-PKM04-24A4Z	 266-PKM04-24A4Y	 266-PKM04-24A4A	 266-PKM04-24A4C	 266-PKM04-24A4D

Panels with Black Bezels

			BLUE	GREEN	BEIGE	AQUA	H. VIOLET
FC	24 modules 24 fibers	 266-PKM04-24B10	 266-PKM04-24B3Z	 266-PKM04-24B3Y	 266-PKM04-24B3A	 266-PKM04-24B3C	-
ST	24 modules 24 fibers	 266-PKM04-24B20	 266-PKM04-24B4Z	 266-PKM04-24B4Y	 266-PKM04-24B4A	 266-PKM04-24B4C	 266-PKM04-24B4D

* All adapters are equipped with zirconia-ceramic split sleeves compatible with MM and SM fibers.

KITTING

As-delivered:

266-PKM04-24000	266-PKM04-24A	266-PKM04-24B
1 × panel	1 × panel	1 × panel
4 × keystone-module blocks	4 × keystone-module blocks	4 × keystone-module blocks
4 × paper label inserts	24 × keystone modules, white bezels	24 × keystone modules, black bezels
1 × set of mounting screws	4 × paper label inserts	4 × paper label inserts
1 × shipping box	1 × set of mounting screws	1 × set of mounting screws
	1 × shipping box	1 × shipping box

Not included:



266-PKM04-24000	266-PKM04-24A	266-PKM04-24B
keystone modules		
cable management bars	cable management bars	cable management bars

CHARACTERISTICS


Form-factor:	19-in rack/cabinet mounting standard (EIA-ECA-310-E).
Capacity:	twenty-four keystone modules; up to 24 optical fibers (FC, ST, SC SX adapters); up to 48 optical fibers (LC DX adapters).
Materials:	panel: 1.5-mm (16-GA) CRS; black powder coating, RAL 9005 (jet black). blocks: high-impact-resistant polycarbonate (PC) resin, UL 94 V-0.
Keystone-module blocks:	front-retractable, patented toolless mechanism.
Labeling:	holder: integral to keystone-module block, clear window; medium: plain-paper inserts, factory-preprinted position numbers.
Connectors:	see Optical Fiber Keystone Modules Data Sheet (264-KMB Series)
Adapter orientation:	key/latch up.
Cable management:	rear, removable, interchangeable (sold separately).
Rack mounting:	set of USCU fasteners: 4 × #10-32 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12-24 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12 × 9/16 × 3/8 plain round washers, nylon, black.
Environmental:	operating temperature: -20 °C – +70 °C (-4 °F – +158 °F); operating humidity: ≤95 % RH non-condensing.
Dimensions:	W: 485 mm (19 in); H: 44.5 mm (1.75 in) [1 RMU]; D: 21 mm (0.83 in).
Weight:	0.3 kg (0.63 lb) without keystone modules.

INSTALLATION INSTRUCTIONS

KEYSTONE MODULE MOUNTING

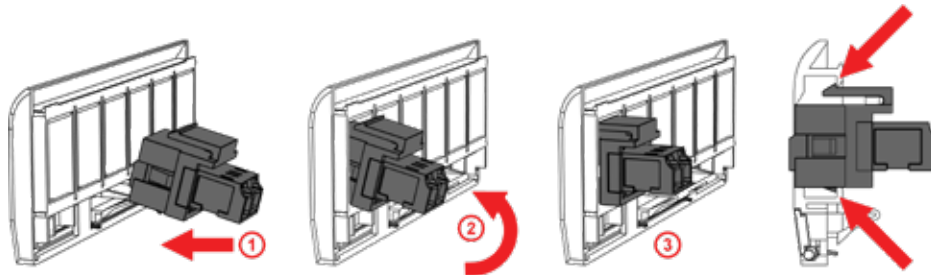


KEYSTONE MODULE BLOCK MOUNTING



KEYSTONE MODULE BLOCK REMOVAL

CABLE MANAGEMENT BAR MOUNTING

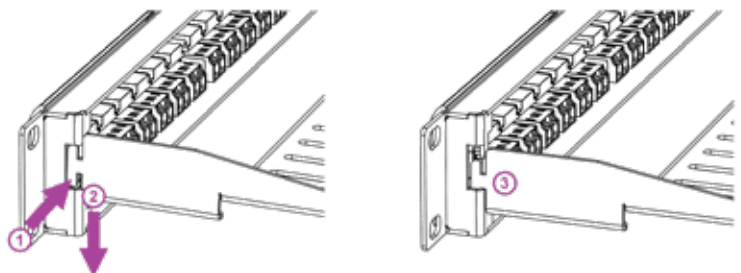

* For a permanent CMB fixation bend slightly the upper part of the CMB anchor inward using a pointing tool, e.g., a screwdriver.