



CROSS-CONNECT

Rack-Mount Panels



Keystone Module Panels – Medium Density–Slot Design

| | | |
|---------------------|---|---------------------------------|
| 266-PKM02-24000 | Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position | Unloaded, w/o Label Holders |
| 266-PKM02-24A[x][y] | Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position | White Bezels, w/o Label Holders |
| 266-PKM02-24B[x][y] | Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position | Black Bezels, w/o Label Holders |
| 266-PKM03-24000 | Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position | Unloaded, Label Holders |
| 266-PKM03-24A[x][y] | Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position | White Bezels, Label Holders |
| 266-PKM03-24B[x][y] | Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position | Black Bezels, Label Holders |

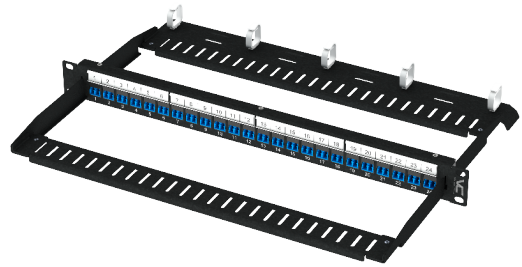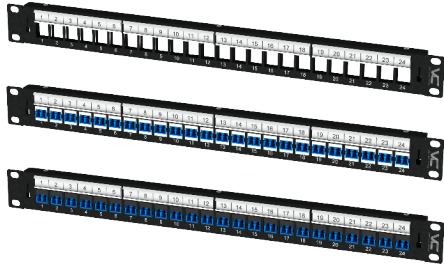

Panels with White Bezels

| | | BLUE | GREEN | BEIGE | AQUA | H. VIOLET |
|-------|-------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| SC SX | 24 modules 24 fibers | | | | | |
| | | 266-PKM02-24A3Z 266-PKM03-24A3Z | 266-PKM02-24A3Y 266-PKM03-24A3Y | 266-PKM02-24A3A 266-PKM03-24A3A | 266-PKM02-24A3C 266-PKM03-24A3C | 266-PKM02-24A3D 266-PKM03-24A3D |
| LC DX | 24 modules 48 fibers | | | | | |
| | | 266-PKM02-24A4Z 266-PKM03-24A4Z | 266-PKM02-24A4Y 266-PKM03-24A4Y | 266-PKM02-24A4A 266-PKM03-24A4A | 266-PKM02-24A4C 266-PKM03-24A4C | 266-PKM02-24A4D 266-PKM03-24A4D |

| | | BLUE | GREEN | BEIGE | AQUA | H. VIOLET |
|-------|-------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| SC SX | 24 modules 24 fibers | | | | | |
| | | 266-PKM02-24B3Z 266-PKM03-24B3Z | 266-PKM02-24B3Y 266-PKM03-24B3Y | 266-PKM02-24B3A 266-PKM03-24B3A | 266-PKM02-24B3C 266-PKM03-24B3C | 266-PKM02-24B3D 266-PKM03-24B3D |
| LC DX | 24 modules 48 fibers | | | | | |
| | | 266-PKM02-24B4Z 266-PKM03-24B4Z | 266-PKM02-24B4Y 266-PKM03-24B4Y | 266-PKM02-24B4A 266-PKM03-24B4A | 266-PKM02-24B4C 266-PKM03-24B4C | 266-PKM02-24B4D 266-PKM03-24B4D |

* All adapters are equipped with zirconia-ceramic split sleeves compatible with MM and SM fibers.

KITTING

As-delivered:

| 266-PKM02-24000 | 266-PKM02-24A/B | 266-PKM03-24000 | 266-PKM03-24A/B |
|--|--|---|---|
| <input checked="" type="checkbox"/> 1 x panel | <input checked="" type="checkbox"/> 1 x panel <input checked="" type="checkbox"/> 24 x keystone modules | <input checked="" type="checkbox"/> 1 x panel | <input checked="" type="checkbox"/> 1 x panel <input checked="" type="checkbox"/> 24 x keystone modules |
| <input checked="" type="checkbox"/> 1 x set of mounting screws <input checked="" type="checkbox"/> 1 x shipping box | <input checked="" type="checkbox"/> 1 x set of mounting screws <input checked="" type="checkbox"/> 1 x shipping box | <input checked="" type="checkbox"/> 4 x label holders <input checked="" type="checkbox"/> 1 x set of mounting screws <input checked="" type="checkbox"/> 1 x shipping box | <input checked="" type="checkbox"/> 4 x label holders <input checked="" type="checkbox"/> 1 x set of mounting screws <input checked="" type="checkbox"/> 1 x shipping box |

Not included:

| 266-PKM02-D8000 | 266-PKM02-D8A/B | 266-PKM03-D8000 | 266-PKM03-D8A/B |
|--|--|---|---|
| <input checked="" type="checkbox"/> keystone modules <input checked="" type="checkbox"/> cable management bars <input checked="" type="checkbox"/> label holders | <input checked="" type="checkbox"/> cable management bars <input checked="" type="checkbox"/> label holders | <input checked="" type="checkbox"/> keystone modules <input checked="" type="checkbox"/> cable management bars | <input checked="" type="checkbox"/> cable management bars |

CROSS-CONNECT

Rack-Mount Panels

Keystone Module Panels – Medium Density – Slot Design



CHARACTERISTICS

| | |
|----------------------|---|
| Form-factor: | 19-in rack/cabinet mounting standard (EIA-ECA-310-E). |
| Capacity: | twenty-four keystone modules; up to 24 optical fibers (SC SX adapters); up to 48 optical fibers (LC DX adapters). |
| Materials: | 1.5-mm (16-GA) CRS; black powder coating, RAL 9005 (jet black). |
| Connectors: | see 264-KMB Series |
| Adapter orientation: | key/latch up. |
| Cable management: | front and rear (concurrent use), removable, interchangeable. (sold separately). compatible CMB models: 266-CFM00-2A3; 266-CFM00-2A4; 266-CFM00-2B3; 266-CFM00-2B4 |
| Labeling: | 266-PKM02: factory-applied position number labeling; 266-PKM03: four plastic label holders, plain-paper label inserts. |
| Rack mounting: | set of USCU fasteners: 4 × #10-32 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12-24 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12 × 9/16 × 3/8 plain round washers, nylon, black. |
| Environmental: | operating temperature: -20 °C–+70 °C (-4 °F–+158 °F); operating humidity: ≤95 % RH non-condensing. |
| Dimensions: | W: 485 mm (19 in); H: 44.5 mm (1.75 in) [1 RMU]; D: 15 mm (0.6 in). |
| Weight: | 0.6 kg (1.3 lb) without keystone modules. |