

18AWG 2 CONDUCTOR STRANDED (7 STRAND) PLENUM RATED




**SKUs: 309-3075/P/5WH
309-3076/P/WH**

DESCRIPTION

18AWG, 2 Conductor, Stranded Bare Copper (7 Strand), Plenum Rated PVC Jacket Pull Box, 500FT, Made in USA

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

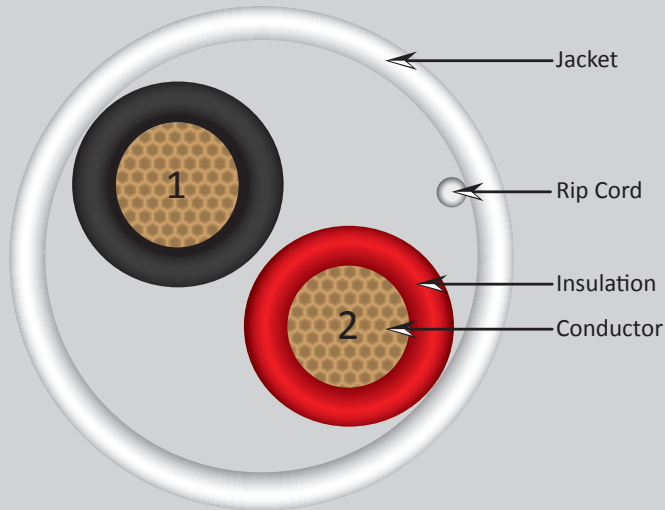

Conductor
Material: 2 Core (Stranded)
Annealed Stranded Concentric Bunched Bare Copper
Size: 18 AWG
Stranding: 7 Strand (7 x 0.0152)

Insulation
Material: PVC
Thickness: .0095"
Colors: Black, Red

Jacket
Material: Plenum Rated PVC
Thickness: 0.015"
Nominal Outer Diameter: 0.157"
Color: White

Ripcord
Material: High Strength Polyester

Electrical Performance
Rated Temperature: -20°C to 75°C
Voltage Rating: 300 Volt RMS

Flame Rating: NFPA 262
Other: RoHS Compliant
Approvals: UL Type CMP, CL3P
UL Subject 13, 444
CSA Type FT4
NEC Article 725, 800

Marking on Jacket
4010346 18AWG 2 COND. PLENUM STRANDED 75C CMP c(ETL)us FT4
CL3P ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET

Packaging:
500FT Pull Box - 309-3075/P/5WH
1000FT Plastic Spool - 309-3076/P/WH

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 08/2019

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.