

# 16AWG 4 CONDUCTOR STRANDED (65 STRAND) PLENUM RATED




## DESCRIPTION

16AWG, 4 Conductor, Stranded Bare Copper (65 Strand), PVC Jacket  
Pull Box, 500FT, Made in USA

## APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

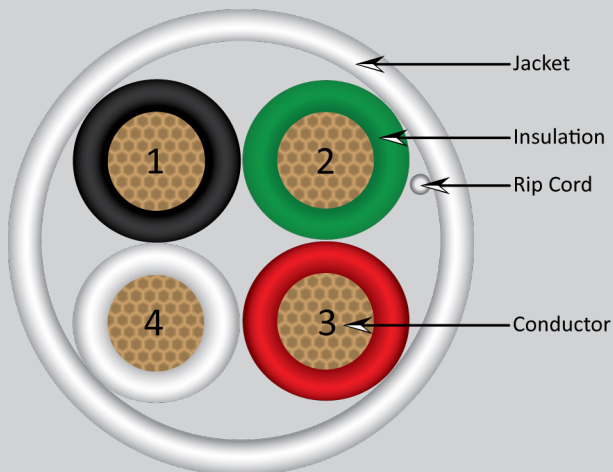

## SKU: 309-3055/P/5WH

<b>Conductor</b>	<b>4 Core (Stranded)</b>
Material	Annealed High-Strand Oxygen Free Bunched Bare Copper
Size	16 AWG
Stranding	65x34
<b>Insulation</b>	
Material	PVC
Thickness	.0095"
Colors	Black, Red
<b>Jacket</b>	
Material	PVC
Thickness	0.0150"
Nominal Outer Diameter	.235"
Color	White
<b>Ripcord</b>	
Material	High Strength Polyester
<b>Electrical Performance</b>	
Rated Temperature	-20C° to 75C°
Voltage Rating	300 Volt RMS
DC Resistance	4.18Ω/1000 FT
Flame Rating	NFPA 262
Approvals	UL Type CMP, CL3P UL Subject 13, 444 CSA Type FT4 NEC Article 725, 800

### Marking on Jacket

4010346 16AWG 4 COND. STRANDED OXYGEN FREE 75C CMP c(ETL)us  
FT4 CL3P ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 05/2019

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.