

ALARM-SECURITY CABLE

22 AWG 2 CONDUCTOR

SOLID CONDUCTORS



210-222SO SERIES

Part Number:	Description:
210-222SO/5GY	Security Cable, Solid, Unshielded, 22 AWG 2 C, Gray 500 ft.
210-222SO/GY	Security Cable, Solid, Unshielded, 22 AWG 2 C, Gray 1000 ft.
210-222SO/WH	Security Cable, Solid, Unshielded, 22 AWG 2 C, White 1000 ft.

DESCRIPTION

22 AWG 2 Conductor Solid Bare Copper, Unshielded with an overall jacket.

CONSTRUCTION

Conductor count: 2
 Shape: Round
 Rip cord: Yes

CONDUCTORS

Material: Bare solid copper
 Trade size: 22 AWG
 Conductor O.D.: 0.02 in. (0.61 mm)
 Insulation material: Polyvinyl Chloride (PVC)
 Insulation O.D.: 0.04 in. (0.96 mm)
 Insulation color: Red, Black

JACKET

Material: Polyvinyl Chloride (PVC)
 Thickness: 0.02 in. (0.45 mm)
 O.D.: 0.1 in. (2.80 mm)
 Marking: VERTICAL 4001453 cETLUS CM/CL2 22AWG
 2C SOLID 75C RoHS V1379P11174 XXXXFT

MECHANICAL

Temperature rating: 75° C

SAFETY


NFPA 70 (NEC®) rating: CM/CL2
 Voltage rating: 300 V RMS

PACKED WEIGHT

210-222SO/5GY 5 lb (2.3 kg)
 210-222SO/GY 9 lb (4.1 kg)
 210-222SO/WH 9 lb (4.1 kg)

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

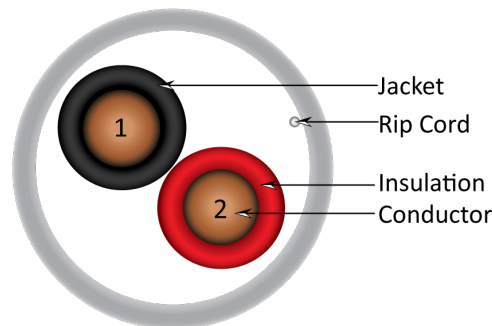

VERTICAL CABLE

951.696.7772 California
 800.749.2447 Florida
 845.391.8318 New York



www.verticalcable.com

Rev. 10/2023
 Subject to change without notice.