

ALARM-SECURITY CABLE

18 AWG 4 CONDUCTOR

STRANDED PLENUM RATED



VERTICAL CABLE


Simply Connect.

DESCRIPTION

18 AWG 4 Conductor Stranded Bare Copper, CL3P, Unshielded with an overall jacket.

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

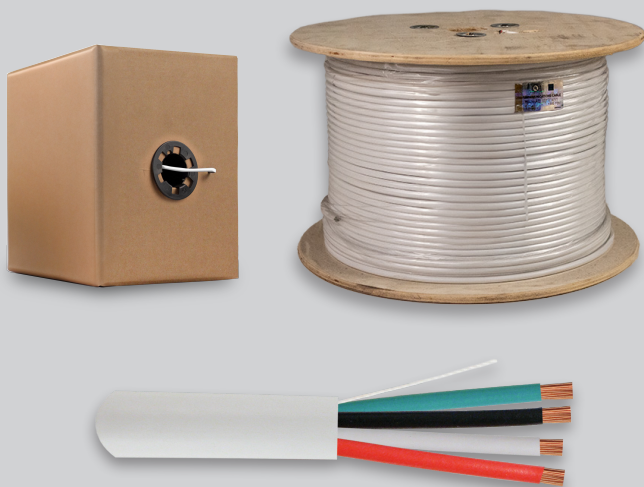

211-184/P SERIES

Part Number:	Description:
211-184/P/5WH (Box)	Security Cable, Stranded, Plenum, 18 AWG 4 C, 500 ft, White
211-184/P/WH (Spool)	Security Cable, Stranded, Plenum, 18 AWG 4 C, 1000 ft, White

CONSTRUCTION

Conductor count: 4
Shape: Round
Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
Trade size: 18 AWG
Stranding: 19 Strand
Strand Diameter: 0.02 in (0.47 mm)
Insulation material: Polyvinyl Chloride (PVC)
Insulation O.D.: 0.07 in. (1.9 mm)
Insulation color: Red, Black, White, Green

JACKET

Material: Polyvinyl Chloride (PVC)
Thickness: 0.02 in. (0.4 mm)
O.D.: 0.18 in. (4.6 mm)
Marking: 18AWG*4C 75C 300V E499713 CMP (UL) c(UL) OR E507553 CL3P (UL) 03/26/2023 RoHS COMPLIANT XXXXFT

MECHANICAL


Temperature rating: 75° C

SAFETY

NFPA 70 (NEC®) rating: CMP/CL3P
Voltage rating: 300 V RMS
DC Resistance per Conductor: @ 20° C 6.92Ω/1000 ft
Nom Capacitance: 29.4pf/ft
Nom Impedance: 73 Ω
Nom Velocity of Propagation: 55%

PACKED WEIGHT

211-184/P/5WH (Box): 16 lb (7.26 kg)
211-184/P/WH (Spool): 33 lb (15 kg)

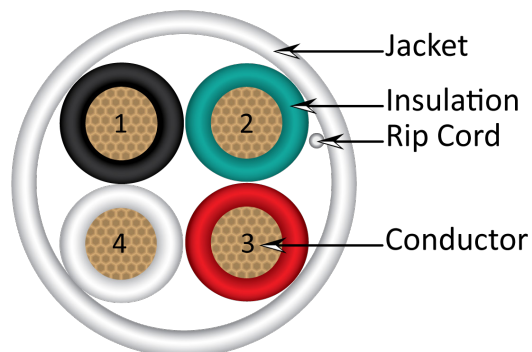

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 11/2023

Subject to change without notice.