

# AUDIO CABLE

## 18 AWG 4 CONDUCTOR

### STRANDED CABLE




### DESCRIPTION

18 AWG 4 Conductor Stranded Bare Copper, Unshielded with an overall jacket.

### APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications

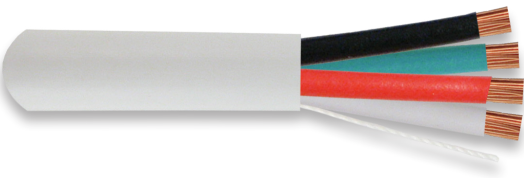

### 209-2329

Part Number:	Description:
209-2329	Audio Cable, Stranded, Unshielded, 18 AWG 4 C, White 500 ft.
209-2329/BK	Audio Cable, Stranded, Unshielded, 18 AWG 4 C, Black 500 ft.

#### CONSTRUCTION

Conductor count: 4  
 Shape: Round  
 Rip cord: Yes

#### CONDUCTORS

Material: Stranded bare copper  
 Trade size: 18 AWG  
 Stranding: 16/0.24 mm  
 Insulation material: Polyvinyl Chloride (PVC)  
 Insulation O.D.: 0.07 in. (1.75 mm)  
 Insulation color: Red, Black, White, Green

#### JACKET

Material: Polyvinyl Chloride (PVC)  
 Thickness: 0.02 in. (0.55 mm)  
 O.D.: 0.22 in. (5.60 mm)  
 Marking: VERTICAL 4002107 c(ETL)us AUDIO CABLE 18AWG 4 COND 16 STRANDED OXYGEN FREE CMR FT4 CL3R RoHS XXXFT

#### MECHANICAL


Temperature rating: 75° C  
 Before Tensile Strength (Mpa): ≥13.8  
 Aging Elongation (%): ≥100  
 Aging Condition (°Cxhrs): 100x168  
 After Tensile Strength (Mpa): ≥85% of unaged  
 Aging Elongation (%): ≥50% of unaged  
 Cold Bend (-20±2° Cx4hrs): No Crack

#### SAFETY

NFPA 70 (NEC®) rating: CMR/CL3  
 Voltage rating: 300 V RMS

#### PACKED WEIGHT

209-2329: 19 lb (8.6 kg)  
 209-2329/BK: 19 lb (8.6 kg)

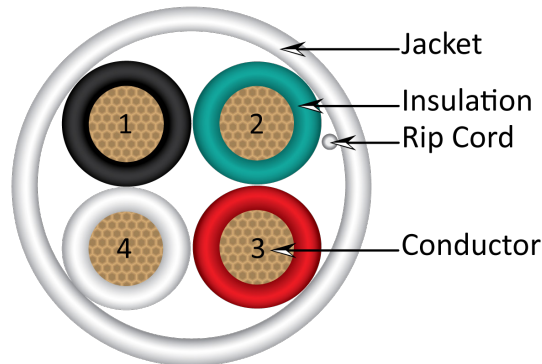

## VERTICAL CABLE

951.696.7772 California  
 800.749.2447 Florida  
 845.391.8318 New York  
 713.322.7242 Texas



verticalcable.com

Rev. 4/2024  
 Subject to change without notice.