

14AWG 2 CONDUCTOR FIRE ALARM CABLE (FPLP-PLENUM) UNSHIELDED




MADE IN USA

DESCRIPTION

Fire Alarm Cable, 14/2, Solid, Unshielded, FPLP (Plenum), 1000ft Spool

FEATURES

- Fire Alarm Cable
- FPLP (Power-Limited Fire Alarm Plenum Cable)
- Fire protective signal circuit
- Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems
- 14AWG 2 Conductor
- 100% Solid Bare Copper Conductors
- Unshielded
- MADE IN USA
- ETL Listed, RoHS Compliant
- Spool Dimensions: 12'H x 12'D
- 1000ft Spool

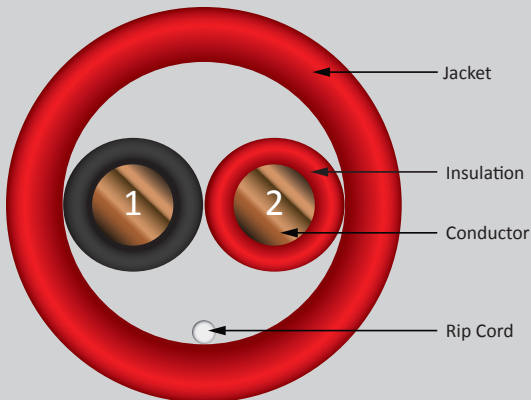

SKU: 315-142/P Series

Conductor

Material 14AWG Solid Bare Copper
Conductors 2 Conductor

Insulation

Thickness (mm) PVC 0.305
Colors Red, Black

Rip Cord

Polyester Rip Cord

Shield

None

Drain

None

Jacket

Thickness (mm) FR-PVC 0.381
Overall Diameter (mm) 5.08
Color Red

Electrical & Physical Properties

Operating Temperature Rating (°C) -20 - 60
Operating Voltage Rating (V RMS) 300
Resistance @20°C (Ω/1000ft) 2.6
Weight (lb/1000ft) 36_____

Ratings/Approvals

NEC Article 760, NFPA 262 Steiner Tunnel Smoke and Flame Test, UL 1424, ETL Listed, RoHS Compliant _____
Does not comply with NYC LL5 (Local Law 5)

Jacket Print

14 AWG 2C PLENUM FIRE ALARM CABLE (ETL) US TYPE FPLP FILE NUMBER MADE IN USA _____

Colors Available

Red, Blue, Yellow

MADE IN USA



VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York

www.verticalcable.com

Rev. 11/2015

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.