

# 14AWG 2 CONDUCTOR STRANDED (41 STRAND)




## DESCRIPTION

14AWG, 2 Conductor, Stranded (41 Strand),  
PVC Jacket, Pull Box, 1000ft. Made in USA.

## APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound / Audio
- Power Limited Control Circuits
- Indoor Applications
- CL3R, CMR (Riser Rated)

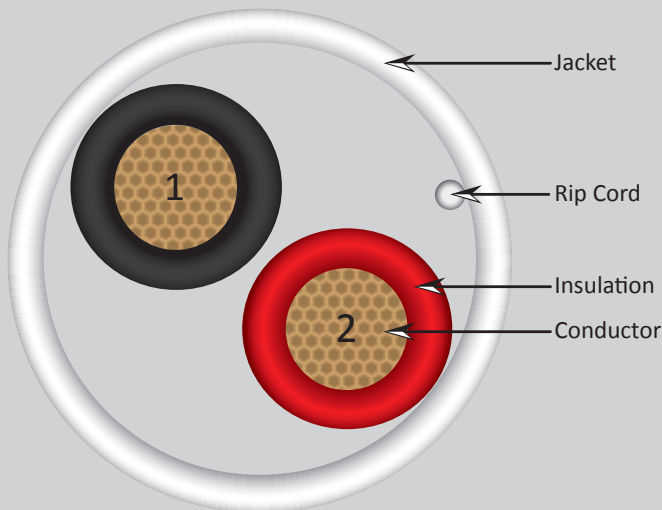

## SKU: 309-2091/WH

**Conductor**  
Material: Oxygen Free Bare Copper  
Size: 14 AWG  
Stranding: 41 Strand

**Insulation**  
Material: PVC  
Thickness: .0125"  
Colors: Black, Red

**Jacket**  
Material: PVC  
Thickness: .015"  
Outer Diameter: 0.215"  
Color: White

**Ripcord**  
Material: High Strength Polyester


**Electrical Performance**  
Rated Temperature: -20C° to 75C°  
Voltage Rating: 300 Volt RMS  
DC Resistance: 2.62Ω/1000FT

Flame Rating: UL 1666  
Approvals: UL Type CMR, CL3R  
UL Subject 13, 444  
NEC Article 725, 800

### Marking on Jacket

4010346 14AWG 2 COND. STRANDED OXYGEN FREE 75C CMR c(ETL)us  
FT4 CL3 ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET



MADE IN USA

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 04/2018

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.