

# 16AWG 2 CONDUCTOR STRANDED (65 STRAND) PLENUM RATED



**SKUs: 309-3035/P/5WH  
309-3036/P/WH**

## DESCRIPTION

16AWG, 2 Conductor, Stranded Bare Copper (65 Strand), Plenum Rated PVC Jacket  
Made in USA

## APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

**Conductor**  
Material 2 Core (Stranded)  
Annealed Stranded Concentric  
Bunched Bare Copper  
Size 16AWG  
Stranding 65 Strand (65x34)

**Insulation**  
Material PVC  
Thickness .0095"  
Colors Black, Red

**Jacket**  
Material Plenum Rated PVC  
Thickness 0.020"  
Nominal Outer Diameter 0.200"  
Color White

**Ripcord**  
Material High Strength Polyester


**Electrical Performance**  
Rated Temperature -20°C to 75°C  
Voltage Rating 300 Volt RMS

Flame Rating NFPA 262  
Other RoHS Compliant  
Approvals UL Type CMP, CL3P  
UL Subject 13, 444  
CSA Type FT4  
NEC Article 725, 800

### Marking on Jacket

4010346 16AWG 2 COND. PLENUM STRANDED 75C CMP c(ETL)us FT4  
CL3P ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET

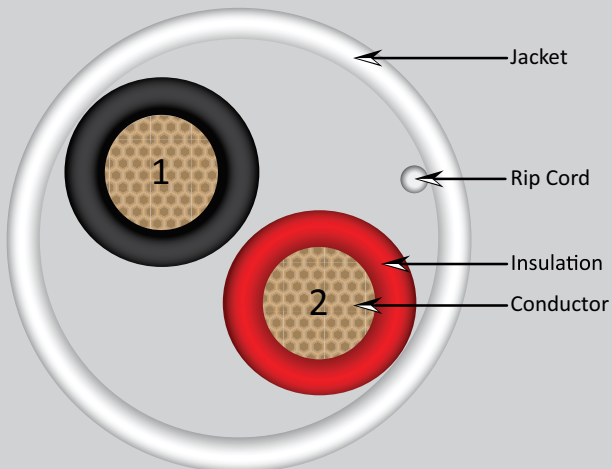

Packaging:  
500FT Pull Box - 309-3035/P/5WH  
1000FT Pull Box - 309-3036/P/WH

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 04/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.