

CAT5E DIRECT BURIAL GEL FILLED (FLOODED CORE)




DESCRIPTION

Category-5E CMXF Direct Burial, Flooded Core, 8-Conductor, 24AWG Solid-Bare Copper.

FEATURES

- High-Performance Data Cable
- 350MHz Bandwidth for Data Applications, Fast Ethernet and 155Mbps TP-PMD/CDDI
- Category-5E Unshielded Twisted Pair
- Easily Identified Color-Striped Pairs
- 24AWG Solid Copper Conductors
- Exceeds TIA/EIA-568B.2, ISO/IEC 11801
- CAN/CSA -C22.2 No. 214
- Direct Burial Gel Filled (Flooded Core)
- ETL Listed, 1000ft Pull Box

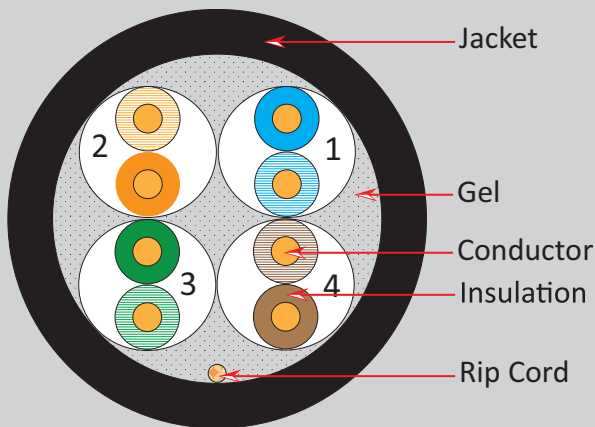

SKU: 059-485/CMXF

Technical Data

Rated Temperature	-40~70 °C
Rated Voltage	60V
Product Standard Certification	CMX
Application	Horizontal Wiring in LAN
Reference Standard	TIA/EIA 568 & ISO/IEC 11801

Conductor

Size Solid Bare Copper

Insulation

Average Thickness	0.008" (0.208mm)
Min. Point Thickness	0.007" (0.186mm)
Insulation Diameter	0.035" (0.91 ±0.005mm)
Twisted Pair Diameter	0.075" (1.92±0.01mm)

Filler

Assembly Dia.

Jacket

Average Thickness	0.023" (0.60mm)
Min. Point Thickness	0.02" (0.54mm)
Outer Diameter	0.21" (5.40±0.10mm)
Rip Cord	Yes

Color of Pairs

- Pair 1: Blue, White-Blue
- Pair 2: Orange, White-Orange
- Pair 3: Green, White-Green
- Pair 4: Brown, White-Brown

Mechanical Characteristics

Test Object	Jacket
Test Material	LLDPE
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-40±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4001453 cETLus VERIFIED UTP 4PR 24AWG OUTDOOR DIRECT BURIAL (FLOODED) UV LLDPE CAT5E 350MHz TIA/EIA - 568B.2 RoHS XXFT (SEQUENTIAL FOOT MARKERS ON JACKET)

Jacket color available in
Black

VERTICAL CABLE

954 454-3554 Florida Office
951 696-7772 California Office
845.391.8318 New York



www.verticalcable.com

Rev. 05/2020
Subject to change without notice.

CAT5E DIRECT BURIAL GEL FILLED (FLOODED CORE)

PERFORMANCE

Electrical Characteristics:

1.0-350MHz Impedance (Ohms)	100±15
1.0-350.0MHz Delay Skew (ns/100m)	<=45
Pair-to-Ground Capacitance Unbalance (pF/100m)	<=330
Max. Conductor DC Resistance 20°C (ohms/km)	93.8
Resistance Unbalance (%)	<=5

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max (dB/100m)	Next (Min dB)
1	20.0	2.0	68.3
4	23.0	4.1	59.3
8	24.5	5.8	54.8
10	25.0	6.5	53.3
16	25.0	8.2	50.3
20	25.0	9.3	48.8
25	24.3	10.4	47.3
31.25	23.6	11.7	45.9
62.5	21.5	17.0	41.4
100	20.1	22.0	38.3
155	18.8	28.1	35.5
200	18.0	32.4	33.8
240	17.4	36.0	32.6
300	16.8	41.0	31.2
350	16.3	44.9	30.1

Frequency (Mhz)	PSNext (Min dB)	ELFEXT Min(dB/100m)	PSELFEXT Min(dB/100m)
1	66.3	63.8	60.8
4	57.3	51.7	48.7
8	52.8	45.7	42.7
10	51.3	43.8	40.8
16	48.3	39.7	36.7
20	46.8	37.8	34.8
25	45.3	35.8	32.8
31.25	43.9	33.9	30.9
62.5	39.4	27.8	24.8
100	36.3	24.0	21.0
155	33.5	20.0	17.0
200	31.8	17.7	14.7
240	30.6	16.2	13.2
300	29.2	14.2	11.2
350	28.1	12.9	9.9

VERTICAL CABLE

954 454-3554 Florida Office
951 696-7772 California Office
845.391.8318 New York

www.verticalcable.com

Rev. 05/2020

Subject to change without notice.