

18AWG 6 CONDUCTOR STRANDED (7 STRAND) RISER, SHIELDED




DESCRIPTION

18AWG, 6 Conductor, Stranded Bare Copper (7 Strand), FR-PVC Jacket
Spool, 500FT, Made in USA

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

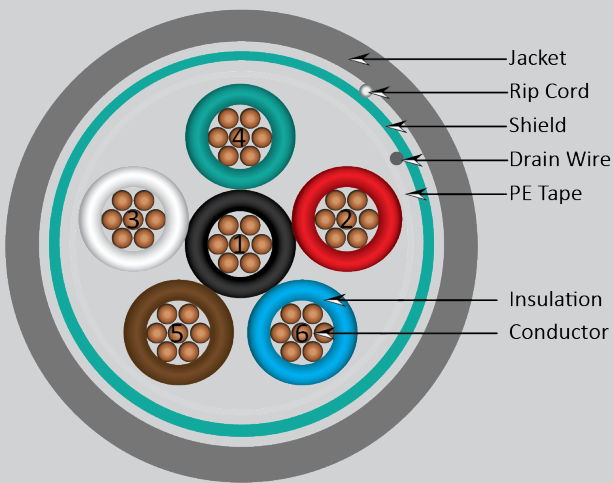

SKU: 309-3100/S/5GY

Conductor	6 Core (Stranded)
Product Description	FR Low Smoke Polyvinyl Chloride (PVC) insulated bare copper conductors jacketed with an overall PVC FR-PVC jacket
Size	22 AWG
Stranding	7
CAP (pF/FT)	65
Shield	Low Smoke Aluminum Mylar
Drain Wire	24 AWG Tinned Copper
Insulation	PVC
Material	0.009" (0.23mm)
Thickness	Black, Red, White, Green, Brown, Blue
Colors	
Jacket	FR-PVC
Material	0.015" (0.38mm)
Thickness	0.230" (5.48mm)
Nominal Outer Diameter	Gray
Color	
Ripcord	High Strength Polyester
Material	
Electrical Performance	
Rated Temperature	-25C° to 75C°
Voltage Rating	300 Volt
Flame Rating	NFPA 262
Approvals	CMP(UL444) NEC 800 CL3P (UL13) NEC 72
Marking on Jacket	4010346 18AWG 6 COND. RISER SHIELDED STRANDED 75C CMP c(ETL) us FT4 CL3P ROHS COMPLIANT MADE IN USA PO##### OPER### CL## [#####FT/ ###FT]
	SEQUENTIAL FOOT MARKERS ON JACKET
	Approximate shipping weight: 51LBS

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 06/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.