

# SECURITY CABLE 22 AWG 4 CONDUCTOR




## DESCRIPTION

Security Cable, 22 AWG 4 CONDUCTOR  
Solid Bare Copper, Riser-Rated  
Unshielded

## FEATURES

- CMR/CL2R
- 22 AWG 4 Conductor
- Solid Bare Copper Conductors
- ETL Listed, RoHS Compliant
- 1000 ft Box

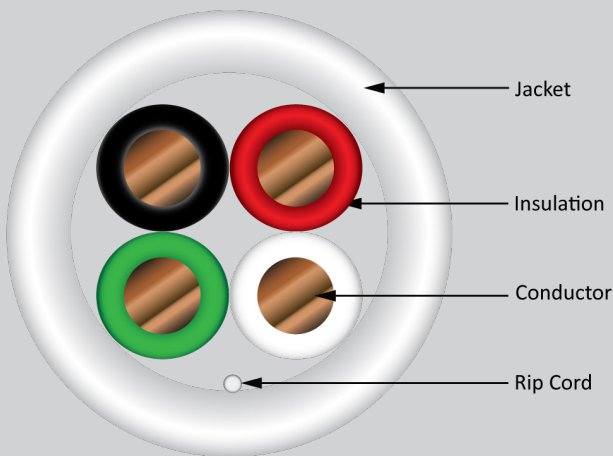

## SKU: 293-2158

### Conductor

Material	22 AWG Solid Bare Copper
Conductor Construction	0.02 in / 0.59 mm
Conductors	2 Conductor

### Insulation

Material	Polyvinyl Chloride (PVC)
Diameter	0.04 in. / 0.96 mm (±0.05)
Average Thickness	0.007 in. / 0.170 mm
Min. Thickness	0.006 in. / 0.150 mm
Colors	Black, Red, White, Green

### Assembly Diameter

0.09 in. / 2.32 mm (±0.01)

### Jacket

Material	Polyvinyl Chloride (PVC)
Outer Diameter	W: 0.12 in. / 3.10 mm (±0.1)
Average Thickness	0.016 in. / 0.40 mm
Min. Thickness	0.014 in. / 0.36 mm
Color	Multiple colors (check availability)

### Rip Cord

Nylon

### Electrical & Physical Properties

Operating Temperature Rating	75°C
Operating Voltage Rating	30 V

### Mechanical Properties

Test Object	Jacket
Test Material	Polyvinyl Chloride (PVC)
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (° C x hrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2° C x 4 hrs)	No Crack

### Ratings/Approvals

RoHS (2011/65/EU) Compliant

### Jacket Print

VERTICAL 4001453 cETLus CMR/CL2R 75C 22AWG 4C SOLID ALARM/  
STATION WIRE CABLE RoHS V1379PXXXX XXXXFT

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[verticalcable.com](http://verticalcable.com)

Rev. 11/2022

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.