

AUDIO CABLE

12 AWG 4 CONDUCTOR

STRANDED CABLE



DESCRIPTION

12 AWG 4 Conductor Stranded Bare Copper, Unshielded with an overall jacket.

APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications



209-2319 SERIES

Part Number:	Description:
209-2319	Audio Cable, Stranded, Unshielded, 12 AWG 4 C, White 500 ft.
209-2319/BK	Audio Cable, Stranded, Unshielded, 12 AWG 4 C, Black 500 ft.

CONSTRUCTION

Conductor count: 4
 Shape: Round
 Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
 Trade size: 12 AWG
 Stranding: 65/0.25 mm
 Insulation material: Polyvinyl Chloride (PVC)
 Insulation O.D.: 0.08 in. (2.10 mm)
 Insulation color: Red, Black, White, Green

JACKET

Material: Polyvinyl Chloride (PVC)
 Thickness: 0.02 in. (0.60 mm)
 O.D.: 0.37 in. (9.50 mm)
 Marking: VERTICAL 5024318 c(ETL)us AUDIO CABLE 12AWG 4 COND 65 STRANDED OXYGEN FREE CMR FT4 CL3 RoHS XXXFT 06607M0221102

MECHANICAL


Temperature rating: 75° C
 Before Tensile Strength (Mpa): ≥13.8
 Aging Elongation (%): ≥100
 Aging Condition (°Cxhrs): 100x168
 After Tensile Strength (Mpa): ≥85% of unaged
 Aging Elongation (%): ≥50% of unaged
 Cold Bend (-20±2° Cx4hrs): No Crack

SAFETY

NFPA 70 (NEC®) rating: CMR/CL3
 Voltage rating: 300 V RMS

PACKED WEIGHT

209-2319: 61 lb (27.7 kg)
 209-2319/BK: 60.5 lb (27.4 kg)

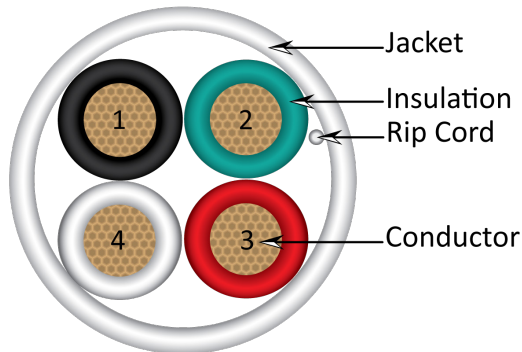

VERTICAL CABLE

951.696.7772 California
 800.749.2447 Florida
 845.391.8318 New York



www.verticalcable.com

Rev. 11/2023
 Subject to change without notice.