




DESCRIPTION

14 AWG 4 Conductor Stranded Bare Copper, Unshielded with an overall jacket.

APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications

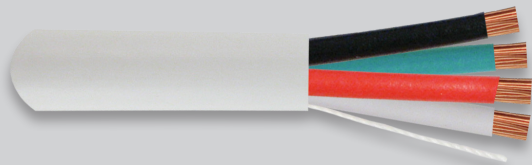

AUDIO CABLE

14 AWG 4 CONDUCTOR

STRANDED CABLE

209-2326

Part Number:	Description:
209-2326	Audio Cable, Stranded, Unshielded, 14 AWG 4 C, White 500 ft.

CONSTRUCTION

Conductor count: 4
Shape: Round
Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
Trade size: 14 AWG
Stranding: 105/0.16 mm
Insulation material: Polyvinyl Chloride (PVC)
Insulation O.D.: 0.10 in. (2.60 mm)
Insulation color: Red, Black, Green, White

JACKET

Material: Polyvinyl Chloride (PVC)
Thickness: 0.03 in. (0.80 mm)
O.D.: 0.32 in. (8.00 mm)
Marking: VERTICAL 4001453 c(ETL)us AUDIO CABLE 14AWG 4 COND 105 STRANDED OXYGEN FREE SUN RES CMR FT4 CL3R RoHS XXXFT

MECHANICAL


Temperature rating: 75° C
Before Tensile Strength (Mpa): ≥ 13.8
Aging Elongation (%): ≥ 100
Aging Condition (°C x hrs): 100 x 168
After Tensile Strength (Mpa): $\geq 85\%$ of unaged
Aging Elongation (%): $\geq 50\%$ of unaged
Cold Bend ($-20 \pm 2^\circ$ C x 4 hrs): No Crack

SAFETY

NFPA 70 (NEC®) rating: CMR/CL3
Voltage rating: 300 V RMS

PACKED WEIGHT

209-2326: 37.5 lb (17 kg)

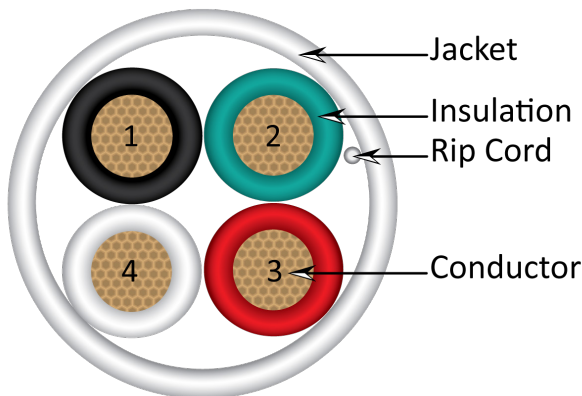

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 11/2023

Subject to change without notice.