

PLENUM F-TYPE CONNECTOR FOR QUAD-SHIELD / STANDARD SHIELD RG6 PLENUM COAX CABLE



DESCRIPTION

RG6 Compression F-Type Connector.
Compatible with RG6 Quad Shield Plenum Coax
Cable / RG6 Standard Shield Plenum Coax Cable.

FEATURES

- F-Type Male connector for RG6 Plenum Coax Cable.
- Compatible with RG6 Quad Shield & Standard Shield Plenum Cable.
- Green plastic identifier ring.
- 25 per pack (Can be bought Individually)
- Suitable Applications: CCTV, Security Cameras, Video.

TOOLS



Compression/Crimping Tool
078-1018

083-1042/PCP/Q

PHYSICAL SPECIFICATIONS

Body Material:	Brass Nickel Plated
Connector Type:	F-Type Male Coax
Style:	Compression Snap-N-Seal
Color Code:	Green
Outer Diameter:	0.43 in. (11 mm)
RG6 Inner Diameter:	0.31 in. (8 mm)

MECHANICAL

Nom Impedance:	75 Ohm
Return Loss:	DC-1 GHz 31 dB Return Loss 1.05 VSWR DC-2 GHz 26 dB Return Loss 1.09 VSWR DC-3 GHz 21 dB Return Loss 1.18 VSWR


Locking:	No
Cable Pullout Force:	≥ 40 lb (18 kg)

CABLE SIZE LIMITS

Conductor Diameter:	0.040 in. - 0.042 in. (1.02 mm - 1.07 mm)
Dielectric Diameter:	0.166 in. - 0.193 in. (4.19 mm - 4.90 mm)
Outer Jacket Diameter:	0.230 in. - 0.281 in. (5.84 mm - 7.14 mm)

WEIGHT

0.05 lb (0.0226 kg)

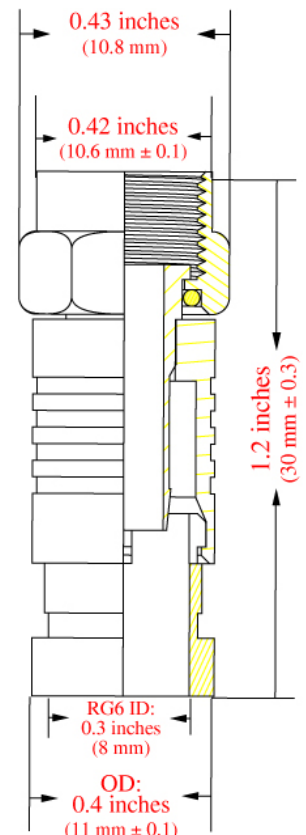

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York

www.verticalcable.com

Rev. 1/2024

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.